

The UniMeasure HX-V Series linear velocity transducer incorporates a self-generating tachometer which eliminates the need for any external power supply. Extra long brush life, excellent stability and a wide operating temperature range make the V series transducer highly reliable for long term service.

SPECIFICATIONS

GENERAL	
---------	--

Available Measurement Ranges	See Supplemental Data", Table 12
Connector	MS3102E-14S-6P

Mating Connector......MS3106E-14S-6S

ENVIRONMENTAL

Operating temperature	40°C to +95°C
Storage Temperature	55° to +100°C

Operating humidity 100%

Vibration...... 15 G's 0.1 ms max.

INGRESS PROTECTION (Exclusive of Wire Rope Area)

Standard IP-65 (NEMA 4) Optional IP-68 (NEMA 6)[2]

ELECTRICAL

Output	See	Table 10

Linearity ±0.10% F.S. with 10 VDC Max Output


Input......None Required; Self Generating

Output Impedance......350Ω

through Range -20°C to 75°C

- Supplemental Data section located at end of HX Series pages.
- 2. Submersion to 2m (6.5') maximum depth in fresh water.

TABLE 10-VELOCITY OUTPUT MEASUREMENT **VELOCITY OUTPUT** RANGE mV/in/sec mV/cm/sec DESIGNATOR 2, 10 200 78 3, 15, 30 136 53 4, 20, 40 103 40 5, 25, 50 82 32 27 6, 60 69 80 52 20 100 180 71 ALL RANGES 180 71 GREATER THAN 100'



MODEL NUMBER CONFIGURATION















BASIC CONFIGURATION

(FOR ALL RANGES)

HX-V-50-S10-N0S-1BC

0 RANGE Select Measurement Range From

Supplemental Data, Table 12 (next page), Insert Corresponding Measurement Range Designator

WIRE ROPE S..... Stainless Steel

(See Supplemental Data, Table 12) N Ø.018 (0,45 mm) Nvlon Jacketed Stainless Steel Ranges to 80" (2m) only. (formerly NJC) Ø.037 (0,94 mm) Nylon Jacketed Stainless Steel Ranges 100" (2.5m) to 500" (12.7m) only.

2 WIRE ROPE TENSION 2...... Reduced (Ranges to 80" only)



..Required Designator Required Designator .Required Designator

NOTES FOR OPTION BOXES 7,8, and 9

IP-65(NEMA 4): Transducer equipped with body mounted connector and with or without mating connector. Mating connector with electrical cable available separately as part number 10119-xM where 'x' is length of electrical cable in meters.

IP-68(NEMA 6): Transducer equipped with bulkhead fitting and length of electrical cable. Remote end of electrical cable may be outfitted with water proof connector. Mating connector with electrical cable available separately as part number 10424-xM where 'x' is length of electrical cable in meters.

7 INGRESS PROTECTION

. IP-65 (NEMA 4) . IP-68 (NEMA 6)

. IP-68 (NEMA 6) Corrosion Resistant Construction

IP-65-NEMA 4 CONNECTOR B...... 6 Pin 3102E Body Mounted Connector

IP-68-NEMA 6 ELECTRICAL CABLE

P..........Bulkhead Fitting w/ 0.3m (12") Electrical Cable

. Bulkhead Fitting w/ 3m (10') Electrical Cable

..... Bulkhead Fitting w/ 4m (13.5') Electrical Cable

. Bulkhead Fitting w/ 5m (16.5') Electrical Cable

......... Bulkhead Fitting w/ 6m (20') Electrical Cable

.... Bulkhead Fitting w/ 7m (23') Electrical Cable

IP-65-NEMA 4 MATING CONNECTOR

C.....IP-65 Mating Connector Included

... IP-65 Mating Connector Omitted* *Electrical cable with mating connector may be ordered separately as part number 10119-xM where 'x' is the length required in meters.

IP-68-NEMA 6 CABLE MOUNTED CONNECTOR

....No connector on end of electrical cable


.IP-68 Cable to cable connector with

NO mating connector**

**Electrical cable with mating connector may be ordered separately as part number 10424-xM where 'x' is the length required in meters. Mating connector alone unavailable



MECHANICAL SPECIFICATIONS

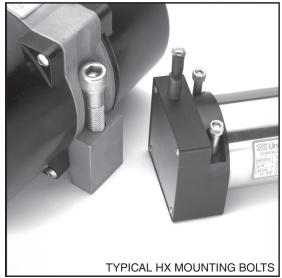

AVAILABLE MEASUREMENT RANGES See Table 12 CONSTRUCTION

Ranges 80" (2 m) and under Anodized Aluminum Mounting Base

Stainless Steel & Anodized Aluminum Housing Ranges 100" (2.5 m) and greater Stainless Steel Mounting Base

High Impact, Corrosion Resistant

Thermoplastic Housings

 Wire Rope Tension
 See Table 12

 Wire Rope Diameter
 See Table 12

 Weight
 See Table 12

 Connector
 MS3102A-14S-6P

Mating Connector MS3106E-14S-6S

Optional NEMA 6 Capability......Bulkhead fitting with shielded twisted pair cable

Life[1]

NOTES:

With 1K ohm potentiometer, wire rope misalignment 2° maximum at full stroke, relatively dust free environment, nylon jacketed wire rope on units with ranges 80° and less.

Use value from this column to indicate overall measurement range

Check mark indicates available measurement range

TABLE 12

MEASUREMENT RANGE	STANDARD MEASUREMENT RANGES		REMENT HX-PA		WIRE ROPE WIRE ROPE TRANS		TENSION DIAMETER		DUCER	Product Photo		
DESIGNATOR	RAI	NGES	HX-P420 HX-P510	HX-EP	HX-V HX-VP	(NON	IINAL)					
	(in)	(mm)	11111010			(oz)	(N)	(in)	(mm)	(lb)	(Kg)	
2	2	50	~	-	V	34	9.4	.016	0.4	2	0.9	
3	3	75	~	-	~	24	6.7	.016	0.4	2	0.9	
4	4	100	~	-	~	24	6.7	.016	0.4	2	0.9	Ω.
5	5	125	~	-	~	19	5.3	.016	0.4	2	0.9	
6	6	150	~	-	~	24	6.7	.016	0.4	2	0.9	
10	10	250	~	V	V	34	9.4	.016	0.4	2	0.9	1) The Address of the
15	15	390	~	-	~	24	6.7	.016	0.4	2	0.9	and the state of t
20	20	500	~	-	~	24	6.7	.016	0.4	2	0.9	The state of the s
25	25	640	~	~	V	19	5.3	.016	0.4	2	0.9	o la
30	30	750	V	-	~	24	6.7	.016	0.4	2	0.9	
40	40	1000	~	-	V	24	6.7	.016	0.4	2	0.9	
50	50	1250	~	V	V	19	5.3	.016	0.4	2	0.9	
60	60	1500	~	V	V	24	6.7	.016	0.4	2	0.9	
80	80	2.0m	~	V	V	21	5.8	.016	0.4	2	0.9	
400	400	0.5					40.0	004	0.0		0.4	
100	100	2.5m	V	V	V	36	10.0	.024	0.6	6.8	3.1	
120	120	3.0m	V	V	~	36	10.0	.024	0.6	6.8	3.1	
150	150	3.8m	V	V	/	36	10.0	.024	0.6	6.8	3.1	
200	200	5.0m	V	V	/	36	10.0	.024	0.6 0.6	6.8	3.1	Ŷ
250 300	250 300	6.3m 7.5m	V	V	7	36	10.0	.024	0.6	6.8	3.1	
350	350	8.8m	~	~		36	10.0	.024	0.6	6.8	3.1	
400	400	10.0m	~	~	~	36	10.0	.024	0.6	6.8	3.1	
400	400	10.0111		~	•	30	10.0	.024	0.0	0.0	J. I	
500	500	12.5m	~	~	1	36	10.0	.024	0.6	8.6	3.9	
600	600	15.2m	~	~	~	36	10.0	.024	0.6	8.6	3.9	
800	800	20.3m	~	~	1	36	10.0	.024	0.6	8.6	3.9	
		_0.0.11	•					.02-7	0.0	0.0	0.0	
1000	1000	25.4m	V	V	-	36	10.0	.024	0.6	12.0	5.4	C .
1200	1200	30.4m	~	~	-	36	10.0	.024	0.6	12.3	5.6	and the second
		~ 	•	•								
1600	1600	40.6m	V	V	-	36	10.0	.024	0.6	14.1	6.4	
1800	1800	45.7m	~	~	-	36	10.0	.021	0.6	15.9	7.2	
2000	2000	50.8m	~	~	-	36	10.0	.021	0.5	16.3	7.4	

Specifications subject to change without notice




OPTION DESCRIPTIONS

OPTION	OPTION DESIGNATOR	DESCRIPTION
NYLON JACKETED WIRE ROPE RANGES TO 80" ONLY	N	Replaces standard stainless steel wire rope with Ø.018 nylon jacketed wire rope. This option increases wire rope life dramatically but may increase non-linearity by as much as ±.05% of full scale.
NYLON JACKETED WIRE ROPE RANGES 100" TO 500" ONLY	J	Replaces standard stainless steel wire rope with \emptyset .037 nylon jacketed wire rope.
ALTERNATE WIRE ROPE EXIT RANGES TO 80" (2.0 m)	1, 2, 3	1 2 3 Comparisons in brackets are millimeters 1.60 (40.6) 1.60 (4
ALTERNATE WIRE ROPE EXIT RANGES 100" (2.5 m) and GREATER	1, 2, 3	1 2 3
NON-STANDARD POTENTIOMETER APPLIES TO HX-PA & HX-VPA ONLY	3, 4	Non-standard potentiometer linearity is as follows: RANGE LINEARITY 5" and Below ±1.00% of full scale 10" to 25" ±0.50% of full scale 30" and above ±0.25% of full scale Note: This option is subject to potentiometer availability.
REVERSED OUTPUT	R	Output is at a maximum when wire rope is fully retracted. Output decreases as wire rope is extended. Does not apply to velocity signal.
IP-68, (NEMA 6) CAPABILITY	2	Connector is replaced with a bulkhead fitting and a designated length of urethane jacketed, shielded, twisted pair cable. Retraction mechanism and electrical components are sealed to IP-68, (NEMA 6) capability.
CORROSION RESISTANT CONSTRUCTION	3	All external anodized aluminum parts of transducer are replaced with stainless steel and corrosion resistant plastic. Transducer is sealed to IP-68 (NEMA 6) capability. Urethane jacketed, shielded, twisted pair cable exits unit. No connector on unit.




DIMENSIONAL INFORMATION

HX SERIES - RANGES TO 80" (2 m)



TOP VIEW

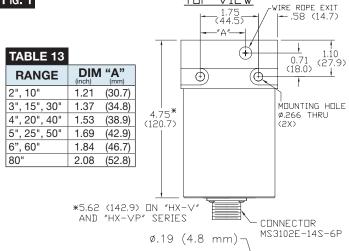

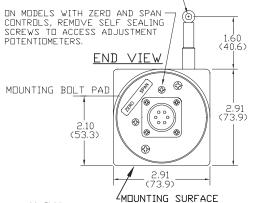


TABLE 14

 Transducer mounts with Ø.25 or M6 Socket head cap bolts.


RANGE		" A" (mm)		"B" (mm)
Ranges to 800"	7.70	(196)	3.80	(97)
1000" to 2000"	11.0	(280)	5.60	(142)


NOTES:


Fig. 1

- 1. Transducer mounts with Ø.50 or M12 socket head cap bolts.
- 2. Dimension "C" is the cable offset that occurs as the cable is extended from the transducer. For "C" in inches, C = .0016 x E where E = extension in inches. For "C" in millimeters, C = .0016 x E where E = extension in mm.

HX SERIES – RANGES GREATER THAN 80" (2 m)

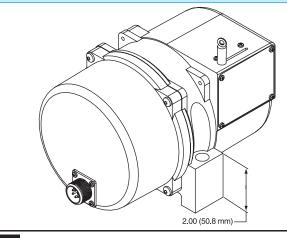

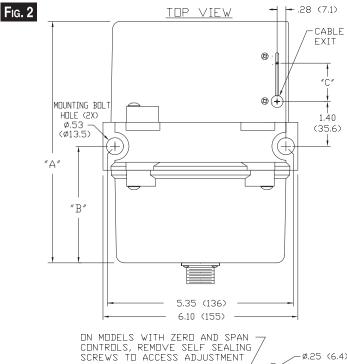

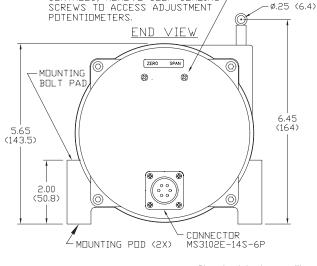

Dimensions in brackets are millimeters